

Komfort 80

Quick Sheet



Solid & Glazed
Movable Wall

Think partitioning.
Think Komfort.

Komfort 80 Quick Sheet




Komfort 80 is a top hung individual solid and glazed panel moveable wall system. Designed to give economical but long-lasting use in the division of spaces where flexibility is required, with a range configurations available to meet acoustic and operation requirements.

This system allows spaces to be divided quickly and easily but also allow them to open back up when a larger space is required. Where space is at a premium, movable walls allow office and commercial spaces to fulfill different requirements with ease.

Overview

Maximum Screen Height	11000mm*
Maximum Module Width	1300mm
Maximum Doorset Height	11000mm*
Acoustic Performance	Up to 57dB*
Fire Performance	None

* Depending on configuration & specification

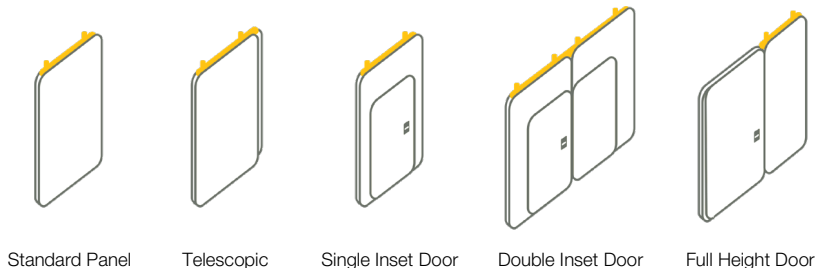

Optional Extras & Finishes

✓ Polyester Powder Coat Finish	✓ Manifestations	✓ Graphics
✓ Switch Glass	✓ MDF	✓ MFC

* Depending on configuration & specification

Performance Summary	Acoustics	Dimensions			Operation		
Glass & Joint Type	dB Rating	Thickness	Max Width	Max Height	Manual	Semi-Auto	Full Auto
Solid Standard Panel	42-57 dB	116/122/134	1300mm	11000mm	✓	✓	✓
Solid Fixed Tele. Jamb	42-57 dB	116/122/134	>200mm	11000mm	✓	✓	✓
Solid Telescopic	42-57 dB	116/122/134	1300mm	11000mm	✓	✓	✓
Solid Passdoor	42-47 dB	116/122/134	1300mm*	11000mm	✓	✓	✓*
Glazed Standard Panel	44-49 dB	115/119	1300mm	4500mm†	✓	✓	✓
Glazed Telescopic	44-49 dB	115/119	1300mm	4500mm†	✓	✓	✓
Glazed Mix	44-49 dB	115/119	1300mm	6000mm†	✓	✓	✓
Glazed Passdoor	44-49 dB	115/119	1300mm*	4500mm	✓	✓	✓*

* Depending on configuration & specification. † For heights above 3300mm panels have to be segmented.

Stacking Systems



Type A **Type B** **Type C** **Type D** **Type E** **Type F** **Type G**

For further information please refer to the **Komfort 80** Design Guide or contact our Specification Team.



This product is available on **NBS Source**.

Birmingham Head Office
Tel | +44 (0) 121 332 2560
headoffice@komfort.co.uk



Not currently available for this product.

Specifier Support
Tel | +44 (0) 121 332 2550
specifiersupport@komfort.co.uk



THE INTERNATIONAL EPD® SYSTEM

Not currently available for this product.

Technical Support
Tel | +44 (0) 1403 390 390
technical@komfort.co.uk