

## Komfire 100+

### At a glance

#### Glass dimensions / glass fire ratings:

Single glazed 30/0  
 (Pyrobel 16 Glass) up to 2963mm  
 Single glazed 60/0  
 (Pyrobel 25 Glass) up to 2463mm  
 Single glazed 60/0  
 (Pyrobel 17N Glass) up to 2963mm  
 Double glazed 30/0  
 (Pyrobel 16 Glass) up to 2963mm

#### Acoustics:

Single glazed - up to 41dB (Rw)  
 Double glazed - up to 41dB (Rw)

#### Structure:

Glazed - up to severe duty

#### Glass type options:

Pyrobel 16  
 Pyrobel 25  
 Pyrobel 17N

#### Weight:

Single glazed 30/0 - 41 kg/m<sup>3</sup>  
 Single glazed 60/0 - 44.5 kg/m<sup>3</sup>  
 Single glazed 60/0 - 65.75 kg/m<sup>3</sup>  
 Double glazed 30/0 - 60.25 kg/m<sup>3</sup>



Similar to the Komfire 100 system, Komfire 100+ is Komfort's glazed module but with enhanced fire performance ratings of up to 60/0. This system is the perfect choice for buildings when stringent fire regulations apply. With Komfire 100+ it is possible to butt joint the glass with Pyrobel 16 and 25.

#### ✓\* Blinds

#### ✓ Manifestations

#### ✓ Graphics

#### ✗ SwitchGlass

#### Paint/ finishes

#### ✓ Polyester powder coat


#### ✓ Satin anodised aluminium

#### ✓ Special anodised finish


\* dependent on system configuration / specification

\*\* based on glass manufacturers test data

Single centre glazed module

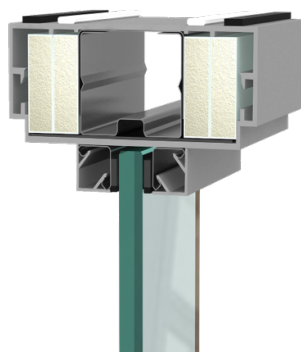

Double glazed module

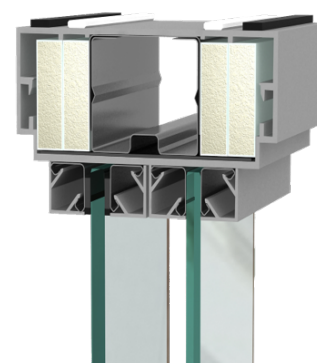

Think partitioning, think Komfort.

**Birmingham Office/Head Office**  
 Tel: +44 (0)121 332 2560  
 Email: [headoffice@komfort.com](mailto:headoffice@komfort.com)

**Technical Support**  
 Email: [technical@komfort.com](mailto:technical@komfort.com)  
[www.komfort.com](http://www.komfort.com)