

## Komfire 100+

### At a glance

#### Glass dimensions / glass fire ratings:

Single glazed 30/30 - up to 2963mm

Single glazed 60/0 - up to 2463mm

Single glazed 60/30 - up to 2963mm

Single glazed 60/60 - up to 2963mm

Double glazed 30/30 - up to 2963mm

Double glazed 60/0 - up to 2463mm

#### Acoustics:

Single glazed – up to 41dB (Rw)

Double glazed – up to 41dB (Rw)

#### Structure:

Glazed – up to severe duty

#### Glass type options:

Pyrobel 16

Pyrobel 25

Pyrobel 17N

\*Pyrocet 6mm

#### Weight:

Single glazed 30/30 – 41 kg/m<sup>3</sup>

Single glazed 60/0 – 15 kg/m<sup>3</sup>

Single glazed 60/30 – 44.5 kg/m<sup>3</sup>

Single glazed 60/60 - 65.75 kg/m<sup>3</sup>

Double glazed 30/30 - 60.25 kg/m<sup>3</sup>



Similar to the Komfire 100 system, Komfire 100+ is Komfort's glazed module but with enhanced fire performance ratings of up to 60/60. This system is the perfect choice for buildings when stringent fire regulations apply. With Komfire 100+ it is possible to butt joint the glass with Pyrobel 16 and 25.

✓\* Blinds

✓ Manifestations

✓ Graphics

✗ SwitchGlass

#### Paint/ finishes

✓ Polyester powder coat


✓ Satin anodised aluminium

✓ Special anodised finish


\* dependent on system configuration / specification

\*\* based on glass manufacturers test data

Single centre glazed module

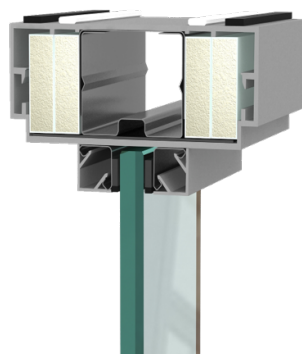

Double glazed module

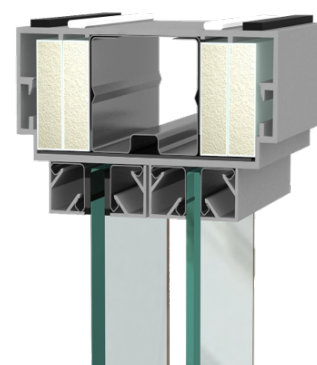

Think partitioning, think Komfort.

Birmingham Office/Head Office

Tel: +44 (0)121 332 2560

Email: headoffice@komfort.com

Technical Support

Email: technical@komfort.com

www.komfort.com